

30" Built-In Bottom Freezer Refrigerator With Ice Maker and Internal Water Dispenser

Panel Ready (Stainless Steel Panel Kit Available)

S30BFR700IMBIP



KEY FEATURES

- Energy Star rated refrigerator & freezer with 16 cu.ft of total storage capacity, powered by variable-speed compressor and dual evaporators.
- Flush or proud installation in 84" high kitchen cabinets.
- Dual Cooling Shield System with independent refrigerator and freezer evaporators prevents odor transfer while delivering faster, more efficient cooling.
- Precise temperature control for optimal food preservation: the Fresco drawer in the refrigerator compartment with independent temperature settings (30°-41°F) allows for optimal storage of meat, cold cuts, shellfish, fish and dairy products.
- Automatic ice maker with daily capacity of 3.9 lbs of filtered ice.
- Internal water dispenser with inline filter for hygienically clean drinking water and ice.
- Digital LED touch interface with controls for temperature adjustment and Super Freeze operation.
- Soft close refrigerator crispers and metal freezer bins.
- Height-adjustable gallon-size door storage bins
- Stainless steel door panels kit available as optional accessory. Stainless steel toe kick included in the unit.
- Reversible doors for left or right swing configuration.
- 2 years parts & labor warranty
- ADA compliant.



PRODUCT FEATURES

Size	Width 30 inches
Door finish	Panel ready
User interface	Internal electronic touch controls with digital LED display
Lighting	Top and sidewall LED lights
Refrigerator shelves	1 stationary + 2 height-adjustable
Refrigerator drawers	1 + 1 Fresco drawer with separate temperature control
Freezer compartment	2 drawers
Door storage	1 gallon-size + 2 height adjustable bins
Ice maker	Automatic ice maker 3.9 lbs / 24 hrs
Settings	Super cool, Super freeze, Water filter replacement alarm, Eco mode, Vacation mode, Sabbath mode

TECHNICAL SPECIFICATIONS

Electrical supply	115 V / 60 HZ / 3 Amp
Power connection	NEMA 5-15P with 90" power cord
Sound rating	43 dBA
Water connection	1/4" waterline with shut-off valve
Water supply pressure	25-80 psi (1.7-5.5 bar)
Energy consumption	551.0 kWh/yr
Certification	ADA Compliant, CB, CEC, ETL
Warranty	2 years parts & labor Sealed system: 5 years labor
Packaging dimensions	W 32 5/16" H 90 9/16" D 26 3/8"
Weight	386.0 lbs

CAPACITY

Refrigerator	11.5 cu. ft.
Freezer	4.5 cu. ft.
Total	16 cu. ft.




30" Built-In Bottom Freezer Refrigerator With Ice Maker and Internal Water Dispenser

Panel Ready (Stainless Steel Panel Kit Available)




S30BFR700IMBIP

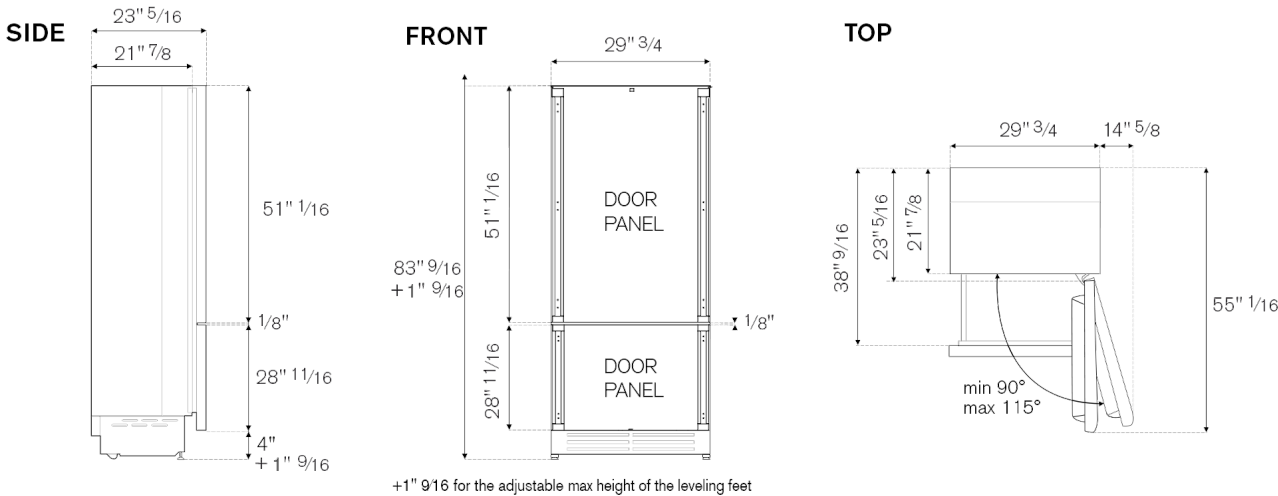


CUTOUT DIMENSIONS

SINGLE INSTALLATION

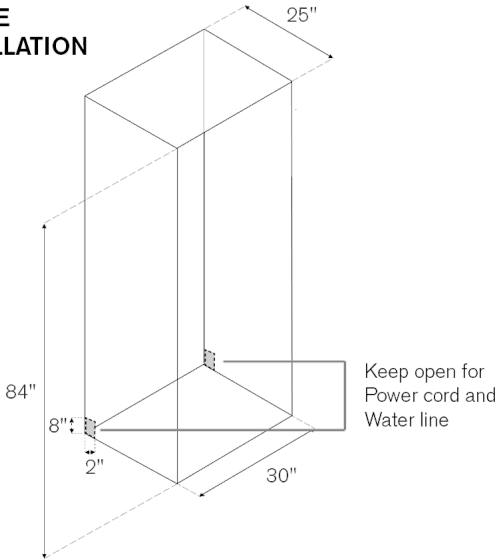



SIDE BY SIDE INSTALLATION

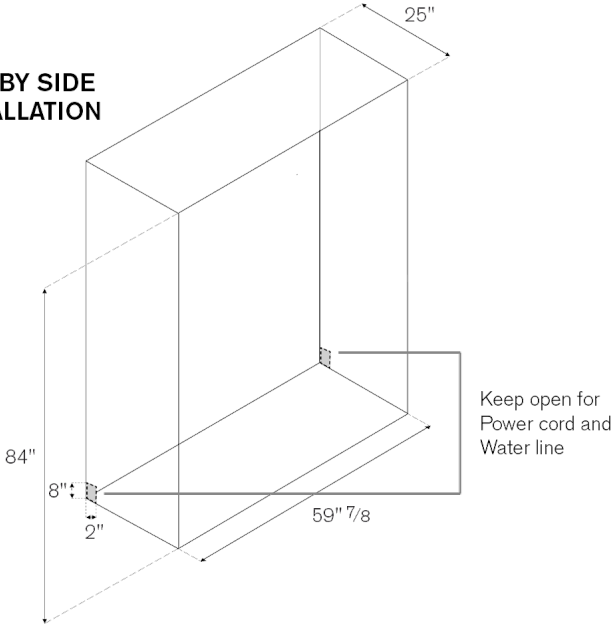

ELECTRICAL & WATER CONNECTION

A properly-grounded, electrical receptacle should be installed. A separate circuit breaker servicing only this appliance is recommended. Do not use a multi-purpose socket with other electrical appliances.

To connect to the water supply system, use a 1/4" waterline with accessible shut-off valve with a length of 60".

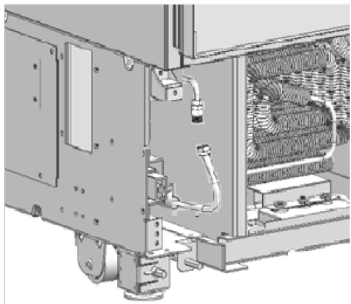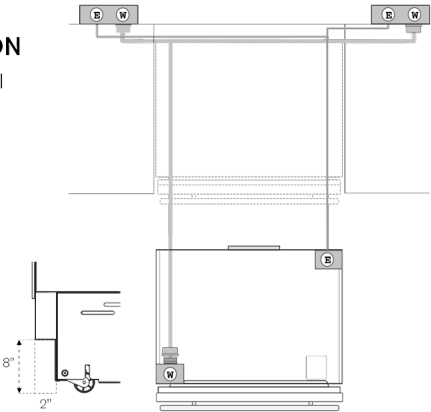

INSTALLATION REQUIREMENTS

If the appliance(s) is not connected through the side profile trims to secured cabinetry, anti-tip brackets must be installed.

The max weight for the cabinet panel is 35 lbs (16kg) for the refrigerator door and 20 lbs (9kg) for the freezer door. For a flush installation, cabinet panels should not be thicker than 15/16".


30" Built-In Bottom Freezer Refrigerator
With Ice Maker and Internal Water Dispenser
Panel Ready (Stainless Steel Panel Kit Available)



S30BFR700IMBIP

CUSTOM DOOR PANELS SPECIFICATION

Panels to be manufactured and fitted by cabinet maker and installer

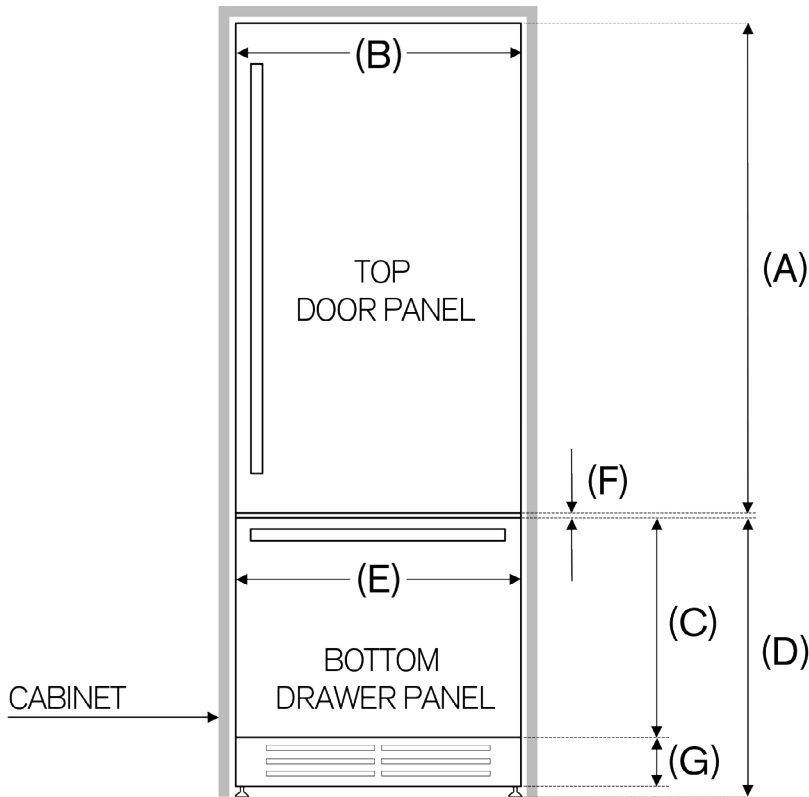

NOTE: These specifications assume a standard toe kick height of 4". For different toe kick heights, adjust C accordingly.

Dimensions - Inches		
(A)	Height of top door panel	51 1/16"
(B)	Width of top door panel	29 3/4"
(C)	Height of bottom drawer panel	28 11/16"
(D)	Height from bottom of product to top of bottom drawer panel	32 11/16"
(E)	Width of bottom drawer panel	29 3/4"
(F)	Gap between top door panel and bottom drawer panel	1/8"
(G)	Toe kick height	4"
(A+D)	Overall height	83 3/4"
Thickness of custom panels		min 3/4" - max 1 1/2"

WEIGHT - POUNDS	
Maximum weight of top door panel	35 lbs
Maximum weight of bottom drawer panel	20 lbs